

Code	Height H (mm)	Length L (mm)	Tappings centre l (mm)	Width	Num. of tubes	Output Δt 50°C 75/65-20 (W)	Output Δt 40°C 70/50-20 (W)	Output Δt 30°C 55/45-20 (W)	Exp. n	Empty weight (kg)	Water content (l)	Electric resistance (W) *
------	---------------	---------------	------------------------	-------	---------------	-----------------------------	-----------------------------	-----------------------------	--------	-------------------	-------------------	---------------------------

**White or coloured**

OSDRTDx57125800	1280	585	550	30	14	<b>489</b>	372	261	1,235	8	4,3	300
OSDRTDx57127300	1280	735	700	30	14	<b>629</b>	478	334	1,24	8,9	5	400
OSDRTDx57165800	1690	585	550	30	18	<b>678</b>	517	365	1,213	9	5,6	500
OSDRTDx57167300	1690	735	700	30	18	<b>787</b>	598	419	1,233	10,3	6,5	600

x = 0 : white / x = 9 : coloured

\*max electric heating element power suitable for this size

Code	Height H (mm)	Length L (mm)	Tappings centre l (mm)	Width	Num. of tubes	Output Δt 50°C 75/65-20 (W)	Output Δt 40°C 70/50-20 (W)	Output Δt 30°C 55/45-20 (W)	Exp. n	Empty weight (kg)	Water content (l)	Electric resistance (W) *
------	---------------	---------------	------------------------	-------	---------------	-----------------------------	-----------------------------	-----------------------------	--------	-------------------	-------------------	---------------------------

**Chromed**

OSDRTD157125800	1280	585	550	30	14	<b>330</b>	251	176	1,235	8	4,3	200
OSDRTD157127300	1280	735	700	30	14	<b>424</b>	322	226	1,24	8,9	5	300
OSDRTD157165800	1690	585	550	30	18	<b>457</b>	349	246	1,213	9	5,6	400
OSDRTD157167300	1690	735	700	30	18	<b>531</b>	403	283	1,233	10,3	6,5	500

\*max electric heating element power suitable for this size

colour: real green mint

**Features**

**Technical characteristics**

- Pipes Ø22 mm
- Round collectors Ø35 mm
- Pipes distance 82 mm
- Max working pressure = 10 bar
- Test pressure = 13 bar
- Max working temperature = 110°C

**Standard equipment**

- 3 x 1/2" connections, internal thread (two bottom connections, one top connection)
- 1/2" air vent
- Kit of 4 brackets

**Special Versions**



- Unique electric: available
- Electrification kit (for mixed use) available on request: kit with ON/OFF switch (class 1) and Schuko plug; kit with analogue (class 2) or digital (class 2) room thermostat and remote control unit (a kit with heating element only is also available) - the maximum outputs of the kit for each size are given in the table
- Chromed product: available
- Coloured version: available
- One-pipe system (see Technical Info pages): yes
- Central connection: not available
- Side connections: not available
- Room divider fixing kit: not available
- Valve and lockshield-valve are to be ordered separately

**NEW Product**

**COLOUR SCHEME**

PRODUCT	BRACKETS
white	white
coloured	coloured
chromed	chromed

**ROUND COLLECTORS**

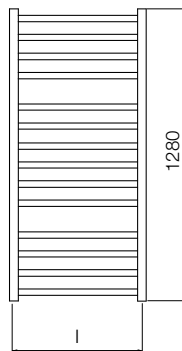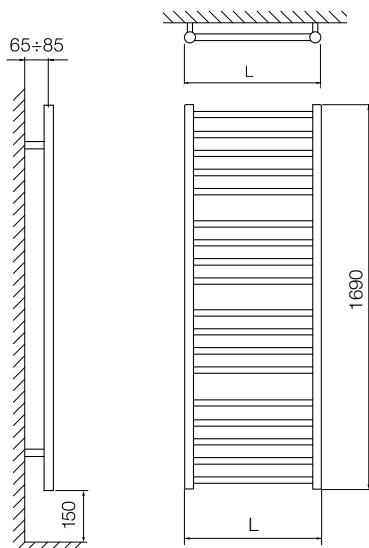

**Spare parts**

**Hidden brackets**



included	
Spare part code 550S014300	white
Spare part code 550S014900	coloured
Spare part code 550S009100	chromed

The exact order of the tubes and of the "openings" between the tubes themselves is that one showed in the technical drawings above; the picture in the page aside can sometimes be only approximate (regarding tubes and of the "openings" between the tubes themselves)